

Broadband High Power Amplifier Module (SSPA)

20-520MHz/50Watt/Module

Model Number: MCW002052M47A

The model MCW002052M47A is a high power amplifier operating between 20MHz and 520MHz and offering a wide dynamic Range with 50 Watts typical saturated power. The employment of LDMOS and chip-and-wire technology in manufacturing ensures this module state-of-the-art power performance with excellent power-to-volume ratio. It is ideal for jamming, EMC, test and measurement applications.

FEATURES:

- Small Size and Light Weight
- Broadband and High Power
- 50 Ohms Input and Output Matched
- Built-in Control and Protection Circuits
- Class AB

ELECTRICAL SPECIFICATIONS @ +28.0VDC, 25°C, 50Ω

Parameter	Symbol	Minimum	Typical	Maximum	Units
Operating Frequency	BW	20		520	MHz
RF Output Power	Pout	50			Watt
Power Gain	Gp		47		dB
Power Gain Flatness	Δ Gp		±2.5		dB
Input Return Loss	S ₁₁			- 10	dB
Harmonics @40 W	H		- 10		dBc
Spurious Signals	Spur		-60		dBc
In/ Output Impedance	Impedance		50		Ω
Operating Voltage	V _{DC}	24	28	32	Volt
DC Current @50W	I _{DD}		7		Amp

MECHANICAL SPECIFICATIONS

Parameter	Value	Units	Limits
Dimensions	150x90x25 [5.91x3.54x0.98]	mm [inch]	Maximum
Weight	0.7 [1.54]	kg [lbs]	Maximum
RF Connectors Input	SMA, Female		
RF Connectors Output	SMA, Female		
DC Interface Connector	D-Sub 9- Pin, Male		
Cooling	External Heatsink (Not Supplied)		

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-20		60	°C	
Non- operating Temperature	-25		65	°C	Storage
Relative Humidity (non- condensing)			95	%	

Absolute Maximum Rating

Input RF drive level without damage	+10 dBm	Maximum
Load VSWR @ POUT =40W	∞ @ all load phase & amplitude for duration of 1 minute 3:1 @ all load phase & amplitude continuous	
Thermal Overload	85°C ±5°C shutdown	Maximum

Chengdu Microwave Technology Co., Ltd

>> 1st Floor, Building 3#, Huidu Science Park, No.5 Xixin Avenue, High-tech West District, Chengdu, China 611731

>>Tel:+86(28)87872669*0

>>Fax:+86(28)87882925

>>Mobile/WhatsApp:+86-181 8078 9271

>>Email: info@cdmicrowave.com

>>www.cdmicrowave.com

Broadband High Power Amplifier Module (SSPA)


20-520MHz/50Watt/Module

Model Number: MCW002052M47A

DC INTERFACE CONNECTOR

Pin #	Description	Specifications
1	ENABLE	Amplifier ENABLE: TTL Logic High (3.3V) (Internally Pulled-Low)
2	TEMP MONITOR	Analog voltage relative to Module's Temperature @ 10 mV/°C
3	CURRENT MONITOR	Analog voltage relative to IDD @ 100 mV per Ampere
4	VDD	28VDC
5	VDD	28VDC
6	GND	Ground
7	GND	Ground
8	GND	Ground
9	VDD	28VDC

OUTLINE DRAWING (All dimensions in mm [inch])

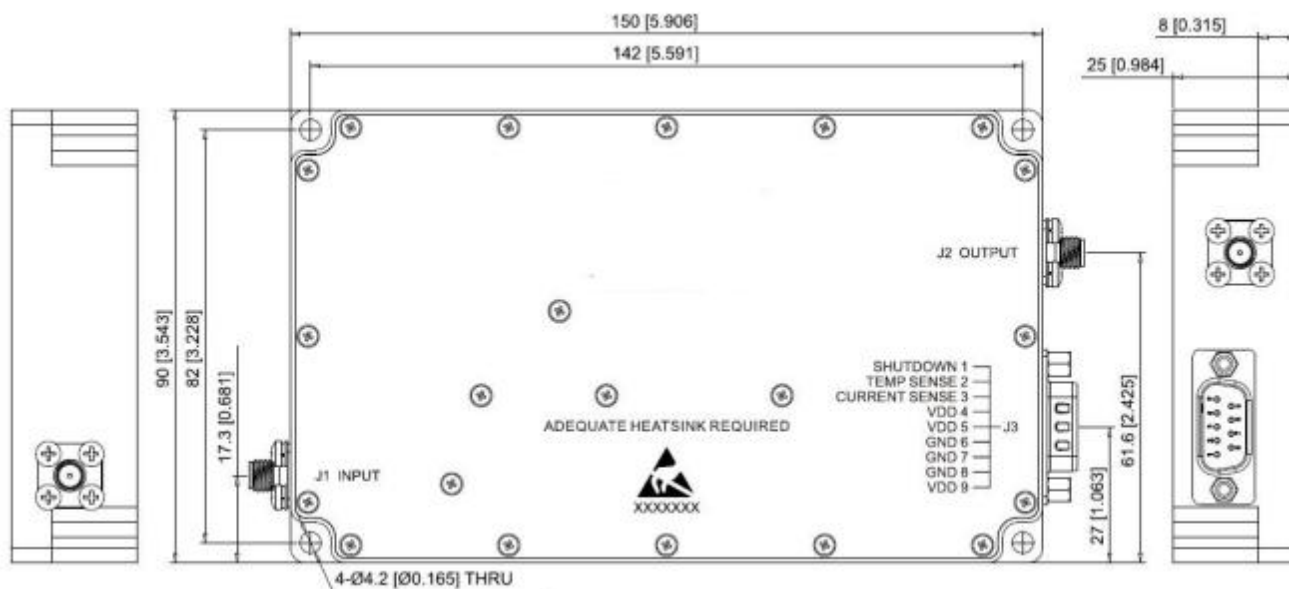

Chengdu Microwave Technology Co., Ltd

>> 1st Floor, Building 3#, Huidu Science Park, No.5 Xixin Avenue, High-tech West District, Chengdu, China 611731

>> Tel: +86(28)87872669*0

>> Fax: +86(28)87882925

>> Mobile/WhatsApp: +86-181 8078 9271


>> Email: info@cdmicrowave.com

>> www.cdmicrowave.com

20-520MHz/50Watt/Module

Model Number: MCW002052M47A

TYPICAL PERFORMANCE PLOTS (for reference)

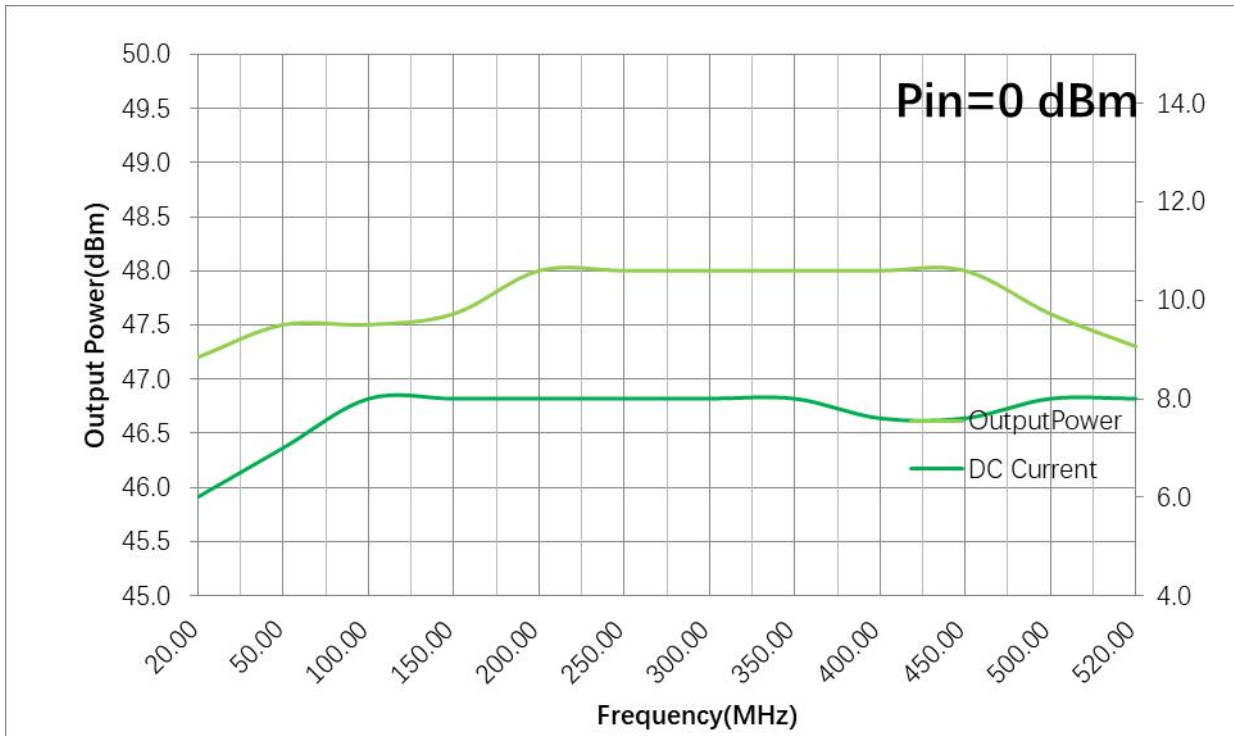

Important Note:

- 1. Adequate heatsink required.
- 2. This product will be developed upon contract/order. All the above specs are for reference only. Actual product may be different. Please check with Chengdu Microwave Technology Co., Ltd sales team or E-mail to info@cdmicrowave.com if you have any more questions.

Chengdu Microwave Technology Co., Ltd

>> 1st Floor, Building 3#, Huidu Science Park, No.5 Xixin Avenue, High-tech West District, Chengdu, China 611731

>>Tel:+86(28)87872669*0

>>Fax:+86(28)87882925

>>Mobile/WhatsApp:+86-181 8078 9271

>>Email: info@cdmicrowave.com

>>www.cdmicrowave.com